




Final System j.d.o.o.
Obrtnička 2, Novaki
Sv. Nedjelja 10431
Hrvatska

STANDARDNI PROFILI

web: www.finalsystem.hr
email: info@finalsystem.hr




PROFIL NO	Ø D mm	Ø d mm	s mm	Kg/m
1701	7.2	5	1.1	0.057
12199	8	6	1	0.060
5286	10	6	2	0.136
7664	10	7	1.5	0.108
12198	10	8	1	0.070
1677	11.5	8.2	1.65	0.138
4229	12	6	3	0.229
7399	12	8	2	0.170
1684	12	10	1	0.093
7665	13	10	1.5	0.146
4354	13.8	7	3.4	0.301
9660	14.1	5.5	4.3	0.358
3518	15.5	11	2.25	0.253
9535	15.5	12.5	1.5	0.178
6176	15.7	6	4.85	0.448
6593	15.75	13.35	1.2	0.148
5117	15.8	11.8	2	0.234
3279	15.8	13.8	1	0.126
4186	15.8	4.85	5.48	0.481
7787	15.9	12.9	1.5	0.183
4313	16	6	5	0.468
3048	16	7	4.5	0.440
6241	16	9	3.5	0.372
3709	16	11	2.5	0.287
5262	16	12	2	0.238
1683	16	14	1	0.127
10891	16.2	13.8	1.2	0.153
7527	17	11	3	0.357
9983	18	12	3	0.383
5501	18.8	16.4	1.2	0.179
3517	19	14	2.5	0.351
3109	19	16	1.5	0.223
6393	19	16.6	1.2	0.181
1563	19.5	17	1.25	0.194
1479	19.5	17.5	1	0.157
4988	19.6	16.5	1.55	0.239
4329	19.8	12.1	3.85	0.522
6660	19.8	13.8	3	0.429
4328	19.8	5	7.4	0.781
12299	20	18	1	0.162

PROFIL NO	Ø D mm	Ø d mm	s mm	Kg/m
4038	20	16	2	0.306
5332	20.15	17.15	1.5	0.238
12155	21	19	1	0.170
6112	22	8	7	0.893
3892	22	14	4	0.612
6195	22	16	3	0.485
4375	22	18	2	0.340
3118	22	19	1.5	0.261
4131	22	20	1	0.178
9757	22.22	19.78	1.22	0.218
3226	22.8	20.8	1	0.183
6423	23	16	3.5	0.581
7526	23	17	3	0.510
6728	23	20	1.5	0.274
7606	23	21	1	0.187
4310	23.8	14	4.9	0.788
4162	24	7	8.5	1.121
5650	24	8.5	7.75	1.072
5651	24	10.5	6.75	0.991
4424	24	11	6.5	0.968
3093	24	14	5	0.808
3932	24	16.5	3.75	0.646
10020	24	18	3	0.536
7437	24	19.26	2.37	0.436
9779	24.1	22.1	1	0.196
5134	24.5	22.5	1	0.200
3057	25	7	9	1.225
9155	25	10	7.5	1.117
3055	25	13	6	0.970
3329	25	16	4.5	0.785
4549	25	17	4	0.715
4553	25	18	3.5	0.640
3326	25	18.5	3.25	0.601
6885	25	19	3	0.561
4353	25	19.3	2.85	0.537
4548	25	20	2.5	0.478
3970	25	21	2	0.391
4412	25	21.2	1.9	0.373
3108	25	22	1.5	0.300
4132	25	23	1	0.204

Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4- %6 razlika u težini.


OKRUGLE CIJEVI



PROFIL NO	Ø D mm	Ø d mm	s mm	Kg/m
3879	26	24	1	0.212
8151	26.5	24.3	1.1	0.237
4125	27.5	22.5	2.5	0.532
6606	28	10	9	1.455
5540	28	12	8	1.362
3119	28	25	1.5	0.338
5135	28	26	1	0.229
9683	29.75	25	2.37	0.554
4254	29.8	8.5	10.65	1.736
4355	29.8	20.2	4.8	1.021
4259	30	7	11.5	1.811
4085	30	9	10.5	1.743
5356	30	10	10	1.702
3530	30	14	8	1.498
3126	30	22	4	0.885
3616	30	24	3	0.689
3890	30	22.5	3.75	0.838
4039	30	20.2	4.9	1.047
4195	30	25	2.5	0.585
4374	30	26	2	0.476
6840	30	27	1.5	0.363
3327	31	24.5	3.25	0.767
3056	32	9	11.50	2.007
3843	32	28	2	0.510
7344	32.4	30	1.2	0.318
10872	32	28.6	1.7	0.439
10380	32.2	29.8	1.2	0.317
7525	33	27	3	0.766
4377	33.5	7	13.25	2.368
6225	34	26	4	1.021
4368	35	8.5	13.25	2.453
8688	35	12.5	11.25	2.275
8958	35	24	5.5	1.381
4547	35	27	4	1.055
5078	35	28	3.5	0.938
3328	35	28.5	3.25	0.878
6103	35	29	3	0.817
9841	35	31	2	0.561
11633	35	32,6	1.2	0.345
5279	36.3	20.2	8.05	1.936

PROFIL NO	Ø D mm	Ø d mm	s mm	Kg/m
6978	36.7	34.1	1.3	0.391
10871	38	34	2	0.613
11130	39.8	35.3	2.25	0.719
11462	39.8	37	1.4	0.458
4320	40	24	8	2.179
6389	40.3	30.5	4.9	1.477
4393	40	32	4	1.255
4080	40	34	3	0.945
4389	40	35	2.5	0.798
6415	40	36	2	0.647
4211	41.2	10	15.6	3.400
8516	41.4	37.4	2	0.671
9650	41.5	10.2	15.65	3.444
7343	42	40	1	0.349
5976	42.4	39.4	1.5	0.522
6455	42.4	39	1.7	0.589
7946	42.7	5.2	18.75	3.823
4468	44	40	2	0.715
7524	44.1	38.1	3	1.049
6387	44.5	20.2	12.15	3.346
12245	45	35.3	4.85	1.658
8675	45	40.5	2.25	0.818
10765	50	47.4	1.3	0.539
6366	50	42.8	3.6	1.422
4462	50	40.3	4.85	1.864
3301	50	44	3	1.200
4048	50	45	2.5	1.011
9527	50	45.4	2.3	0.934
6531	50	46	2	0.817
4819	50	46.4	1.8	0.738
7803	50	47	1.5	0.620
5106	50	38.5	5.75	2.166
4735	51	48	1.5	0.632
6388	54.2	50.3	1.95	0.867
5107	54.8	21.9	16.45	5.370
4809	55	50.3	2.35	1.053
7968	55.1	52.5	1.3	0.595
5504	56	53	1.5	0.695
5532	59	56	1.5	0.734
4217	59.8	52.2	3.8	1.811


Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4-%6 razlika u težini.



PROFİL NO	Ø D mm	Ø d mm	s mm	Kg/m
6373	59.9	57.6	1.15	0.575
9089	60	40	10	4.256
11453	60	52	4	1.907
5174	60	55	2.5	1.223
4458	60	56	2	0.987
4821	60	57	1.5	0.747
3935	60	57.8	1.1	0.551
9477	64.7	60.3	2.2	1.170
6962	65	60	2.5	1.330
4399	65	62.6	1.2	0.651
12244	70	40.4	14.8	6.955
3434	70	67	1.5	0.875
10024	76	70	3	1.864
4888	76	73.4	1.3	0.824
7760	77	37	20	9.705
5533	79	76	1.5	0.989
9537	79.6	76	1.8	1.192
10443	80	76	2	1.329
6199	80	50.6	14.7	8.172
11081	80	77.4	1.3	0.871
10892	80.2	78	1.1	0.741
11239	85	82.4	1.3	0.926
12017	85	76	4.5	3.084
7312	90	86	2	1.498
11080	90	87.4	1.3	0.982
11079	95	92.4	1.3	1.037
3719	100	94	3	2.477
9088	100	80	10	7.662
11124	100	95	2.5	2.075
3850	100	97	1.5	1.257
3934	100	97.6	1.2	1.005
3455	100	96.4	1.8	1.505
11240	105	102.4	1.3	1.148
11082	110	106.8	1.6	1.477
12405	110	70	20	15.325
9096	111	57.5	26.75	19.187
11238	115	111.8	1.6	1.545
4409	120	110	5	4.895
3839	120	116.8	1.6	1.612
11236	128	124.2	1.9	2.040

[illegible]


L PROFIL



PROFIL NO	a mm	b mm	c mm	Kg/m
6555	5	27	1.5	0.123
* 6056	8	70	1.5	0.302
4490	10	15	1.3	0.083
6360	10	15	1.5	0.095
1619	10	20	1.2	0.093
10091	10	24	1.4	0.123
6653	10	25	5	0.406
* 7394	10	30	2	0.204
1436	10	40	2	0.260
* 4729	12	84.5	1.3	0.333
* 1556	13	35	4	0.471
1338	15	10	1.3	0.077
10234	15	20	1.2	0.110
* 5853	15	25	5	0.473
1437	15	25	2	0.205
3155	15	30	1.2	0.146
* 7321	15	30	2	0.231
* 6588	15	40.9	1.5	0.217
9686	16	78	2	0.498
9440	17.5	82	2.5	0.656
3103	19.82	40	1.3	0.206
1278	20	30	1.3	0.171
9304	20	30	6	0.715
3903	20	40	1.5	0.235
3902	20	40	1.3	0.206
1456	20	40	1.2	0.191
3904	20	40	2	0.314
8264	20	40	3	0.463
9588	20	50	1.3	0.242
11359	20	50	2	0.369
1371	20	60	1.2	0.256
3061	20	60	1.5	0.319
9587	20	70	1.3	0.312
11360	20	70	2	0.477
11425	20	80	1.3	0.348
9804	20	100	1.5	0.482
7898	20	150	1.8	0.820
* 7389	21.5	40	2	0.322
3266	24.8	49.5	3	0.573
4322	25	30	2	0.287

[illegible]

* Radiuslu / Pah'lı




PROFİL NO	a mm	c mm	Kg/m
1583	10	1.5	0.075
6931	12	2	0.118
3172	15	1.1	0.084
1575	15	1.5	0.115
8025	15	2.8	0.206
3058	20	1.2	0.126
6420	20	1.6	0.166
3136	20	1.9	0.196
5968	20	8	0.693
3059	25	1.2	0.158
6421	25	1.6	0.209
3256	25	2	0.260
3840	25	3	0.382
8865	25	5	0.610
1241	30	1	0.159
3060	30	1.2	0.191
3901	30	1.5	0.237
10355	30	2	0.314
1631	30	3	0.463
6422	40	1.2	0.256
3162	40	2	0.422
4077	40	3	0.626
1212	40	4	0.823
3944	40	4.7	0.959
4056	40	5	1.016
7472	45	2	0.476
6246	50	1.3	0.347
6752	50	2	0.530
4386	50	3	0.787
10100	50	4	1.040
* 9572	50	5	1.301
1211	50	5	1.287
9919	55	5	1.423
4811	60	2	0.638
8177	60	6	1.853
* 5209	90	48	17.167

[illegible]

* Radiuslu / Pah'lı

Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4-%6 razlika u težini.


PRAVOKUTNI PROFILI

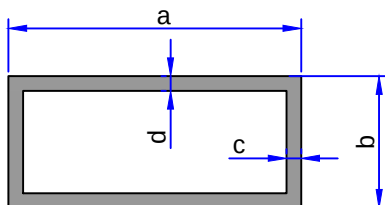

PROFIL NO	a mm	b mm	c mm	d mm	Kg/m
* 10518	11.4	12.2	1.14	1.14	0.124
* 8871	15	10	1.4	1.4	0.157
10058	20	12	2	2	0.303
11689	20	14	1.3	1.3	0.221
* 1652	20	18	1.5	1.5	0.282
* 6069	20.2	10.2	1.5	1.5	0.222
* 10075	24.8	13.8	2	2	0.372
* 3746	25	12	1.6	1.6	0.291
* 6511	25	15	1.5	1.5	0.300
3779	25	15.7	1.5	1.5	0.302
3018	25	17	1.2	1.2	0.257
10233	25	17	2	2	0.411
* 6194	25	20	1.5	1.5	0.341
10071	25	20	2	2	0.444
* 10076	28	17	1.35	1.35	0.298
* 1653	28	22	1.5	1.5	0.379
* 6838	30	10	1	1	0.205
10059	30	12	2	2	0.411
4019	30	15	1	1	0.233
1441	30	20	1.1	1.1	0.284
9664	30	20	1.5	1.5	0.382
1350	30	25	1.1	1.1	0.314
10119	30	25	1.5	1.5	0.422
6551	33	15	1.5	1.5	0.365
* 6662	33	38	3.75	3.75	1.218
* 5777	35	20	2	2	0.552
1475	40	15	1.1	1.1	0.318
1651	40	20	1	1	0.314
3017	40	20	1.2	1.2	0.374
4638	40	20	1.6	1.6	0.492
* 5490	40	20	1.9	1.9	0.551
* 7342	40	20	2	2	0.597
1650	40	20	2	2	0.607
* 6589	40	25	1.5	1.5	0.504
1349	40	30	1.1	1.1	0.404
* 6296	40	30	1.5	1.5	0.544
* 6297	40	30	2	2	0.714
11348	40	30	3	3	1.040
7663	41	26	2.5	2.5	0.840
* 9747	42	24.5	1.8	1.55	0.553

Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4- %6 razlika u težini.

* Radiuslu / Pah'li

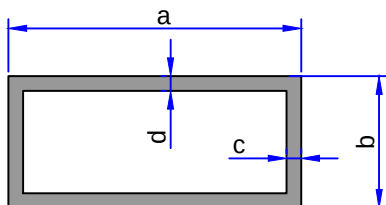


PROFIL NO	a mm	b mm	c mm	d mm	Kg/m
6672	50	15	1.2	1.2	0.407
* 5837	50	15	2.5	2.5	0.812
* 10894	50	15	1.5	1.5	0.495
9645	50	20	1.5	1.5	0.544
9642	50	20	3	1.5	0.682
* 5402	50	25	2.9	2.9	1.087
* 6205	50	30	1.8	1.8	0.744
7313	50	30	2	2	0.823
* 9592	50	30	2	2	0.815
* 7722	50	30	3	3	1.202
1649	50	40	1.05	1.05	0.500
3015	50	40	1.2	1.2	0.569
3900	50	40	1.6	1.6	0.745
4454	50	40	2	2	0.932
12279	53	25	4	4	1.517
1453	60	20	1.4	1.4	0.585
7784	60	20	3	3	1.203
7630	60	30	1.4	1.4	0.661
4524	60	40	1.7	1.7	0.890
3225	60	40	2	2	1.040
11520	60	40	3	3	1.528
1662	63.5	25	0.8	0.8	0.376
6189	65	40	2	2	1.094
10836	68	28	0.8	0.8	0.409
1465	68	28	1	1	0.509
* 6663	68	33	3.75	3.75	1.819
3102	69	29	1	1	0.540
4636	69	29	2	2	1.018
11378	70	50	2	2	1.257
1689	71	31	0.8	0.8	0.434
1440	73	31	1.1	1.1	0.606
10835	75	32	0.9	0.9	0.513
3065	75	32	1.2	1.2	0.680
4637	75	32	2	2	1.116
3891	75	32	3	3	1.642
* 10203	80	14	1.6	1.6	0.785
4274	80	20	1.6	1.6	0.839
3414	80	40	1.6	1.6	1.003
* 10840	80	40	1.6	1.6	0.996
5674	80	40	2	2	1.257


* Radiuslu / Pah'li

Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4- %6 razlika u težini.

PRAVOKUTNI PROFILI

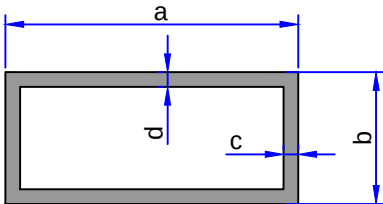[illegible]

* Radiuslu / Pah'lı




PROFİL NO	a mm	c mm	Kg/m
10766	10	1.3	0.122
* 6582	10	1.8	0.159
* 6835	12	2	0.214
* 7579	13.8	2	0.253
10767	14	1.3	0.179
10070	14	2	0.260
* 6295	15	1.5	0.218
* 5770	15	2	0.281
6910	16	1.5	0.236
* 8985	17	1.35	0.223
* 5491	18	1.9	0.304
3898	20	1.2	0.244
* 5403	20	2	0.389
1579	20	1.1	0.225
* 4973	25	1.8	0.435
4683	25	1.2	0.309
11803	25	2	0.489
* 5385	25	2.25	0.552
8736	25	3	0.715
* 9475	25	5.3	1.135
* 6456	27.5	1.4	0.396
1559	30	1.1	0.344
9729	30	2	0.606
* 5739	30	2.35	0.664
* 4360	32	2	0.613
* 11120	35	2	0.713
3019	40	1.1	0.459
6238	40	1.2	0.504
4456	40	1.6	0.661
* 5489	40	1.9	0.757
3899	40	2	0.823
8735	40	2.5	1.016
5281	40	3	1.200
6245	40	4	1.560
* 3881	42.8	1.1	0.260
6666	45	1.8	0.842
6943	45	3	1.365
3893	50	1.2	0.634
4532	50	2	1.040
* 5787	50	3	1.527

[illegible]

* Radiuslu / Pah'lı

Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4-%6 razlika u težini.


U PROFIL



PROFIL NO	a mm	b mm	c mm	d mm	e mm	Kg/m
4230	7	4	4	2	2	0.060
* 10017	10.4	11.2	11.2	1.2	1.2	0.096
1620	11	13	13	1.5	1.5	0.138
* 9876	12	20	20	2	2	0.260
* 9999	12.6	20	20	1.1	1.1	0.149
* 9924	12.9	11.2	11.2	1.2	1.2	0.105
* 1627	12.9	15.2	15.2	1.2	1	0.126
1309	13	11	11	1.5	1.5	0.138
* 1500	13	28	28	1.2	1.2	0.214
* 12312	13.7	25	25	1.6	1.6	0.261
* 9702	14.2	8	8	1.1	1.1	0.083
* 10053	14.9	13.2	13.2	1.2	1.2	0.124
10271	15	25	25	2	2	0.330
6451	15	15	15	2	2	0.221
1637	15	17	17	1.5	1.5	0.186
3283	15.4	17.4	17.4	1	1	0.130
* 6854	16.5	27	27	1.6	1.6	0.290
3049	17	17	17	1.1	1.1	0.145
* 10079	17	20	20	2	2	0.287
* 10051	17	40	40	2	2	0.504
5919	17	20	20	3	4	0.444
5863	17	40	40	3	4	0.769
3050	18	20	20	1.1	1.1	0.165
* 12311	18	25	25	2.5	2.5	0.426
* 3667	19	30	30	4	3	0.706
* 5120	20	6.5	6.5	2	1.5	0.134
7305	20	15	15	1.8	1.8	0.226
6452	20	20	20	2	2	0.303
* 6453	20	30	30	2	2	0.411
* 6454	20	40	40	2	2	0.519
9261	20.4	17	17	1	1	0.141
* 5007	20.5	8	8	1.1	1.1	0.101
* 11151	20.5	24.8	24.8	1.1	1.1	0.202
* 3372	20.5	25	25	1.24	1.24	0.226
* 9302	20.6	12	12	1.1	1.1	0.126
* 6953	21	23	23	1.5	1.5	0.260
1469	21	25	25	1.8	2.3	0.352
* 11603	21	25	25	1.5	1.5	0.274
* 10420	21.2	4	4	1.2	1.3	0.091
3578	21.2	25	25	1.2	1.2	0.223

Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4-%6 razlika u težini.

* Radiuslu / Pah'li




PROFIL NO	a mm	b mm	c mm	d mm	e mm	Kg/m
9303	21.4	10	10	1.1	1.1	0.116
7960	22	14.2	14.2	1.5	1.6	0.196
9182	22.3	17.1	17.1	1.4	1.4	0.204
* 9400	22.8	32.9	32.9	2	2	0.458
* 6161	23	23	23	1.5	1.5	0.268
* 1495	25	25	25	1.2	1.2	0.234
* 10723	25	30	30	2	2	0.439
* 10553	25	20	20	1	1	0.169
10966	25	50	50	5	5	1.558
1214	27	30	30	3	4	0.715
9965	29	35	35	2.5	2.5	0.636
* 8716	30	30	30	2.3	2.3	0.523
* 9703	30.2	8	8	1.1	1.1	0.130
1216	33	36	36	2	4	0.704
7314	35	35	35	1.9	1.9	0.520
* 5121	44	16.1	16.1	2	1.5	0.336
* 6933	45.3	20.5	20.5	1.2	1.2	0.273
9525	45.4	15	15	1.7	1.5	0.309
10556	48	20	20	1	1	0.233
* 6987	48	32	32	3	3	0.861
* 6017	50	50	50	2.3	2.3	0.906
10558	50	20	20	2	2	0.466
* 4687	50	35	35	1.5	1.5	0.475
* 11426	50	65	65	4	4	1.859
3181	53.4	8	8	2.3	2.3	0.399
* 5119	54	19.4	19.4	2	1.5	0.412
10156	60	60	60	2	2	0.953
7530	62	6.5	6.5	1.5	1.5	0.292
6190	70	27.5	27.5	2	2	0.656
9127	81.2	22	22	1.5	1.5	0.496
* 6751	83	25	25	6	6	1.967
9708	90	20	20	2	2	0.683
10662	100	21	21	1.2	1.2	0.453
* 7633	115	4	4	2.5	1.5	0.500


* Radiuslu / Pah'li

Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4-%6 razlika u težini.

TOPAL U PROFIL

[illegible]

* Radiuslu / Pah'lı




PROFİL NO	a mm	b mm	Kg/m
6587	10	2	0.054
4028	12	1.6	0.052
6941	12	2.5	0.081
4941	12	3	0.097
8705	12	5	0.162
1449	12.6	2.5	0.085
8926	13.9	8.9	0.335
7474	15	2	0.081
3229	15	2.5	0.100
6559	15	3	0.121
3718	15	3.1	0.126
6630	18	2.5	0.121
1573	20	2	0.108
3121	20	4.5	0.246
1243	20	5	0.271
1487	25	2	0.135
3708	25	2.5	0.169
3594	25	3	0.203
3441	25	5	0.338
8706	27	16	1.171
4312	30	2	0.162
7352	30	4	0.325
3202	30	6	0.487
4026	30	6.75	0.548
7863	30	10	0.813
6221	40	2	0.216
4534	40	3	0.325
9165	40	4	0.433
*3948	44	9.8	1.167
7341	45	12	1.463
10064	46	4	0.498
9675	55	4	0.596
9798	60	1.4	0.228
3532	60	2	0.325
7673	60	4	0.650
12278	60	10	1.626
8618	65	14	2.466
6287	70	3	0.569
10811	70	4	0.759
5270	75	7	1.422

[illegible]

* Radiuslu / Pah'lı


Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4-%6 razlika u težini.

LAMA PROFIL S RADIJUSOM




PROFİL NO	a mm	b mm	r mm	Kg/m
1640	10	1.2	0.5	0.031
9050	10	1.8	0.5	0.048
5492	16	5	0.5	0.216
9739	19	17	0.5	0.875
4228	20	3	0.5	0.162
8919	25	8	1	0.540
5956	25	10	2	0.668
10456	25.1	9.1	1.3	0.607
4559	25.8	9.4	1	0.654
8902	30	5	0.5	0.405
4634	35	5	0.5	0.473
4427	35	10	0.5	0.947
9461	35	10	3	0.928
10457	35.8	14	0.8	1.356
10003	39	10	0.4	1.057
4366	40	6	0.5	0.649
7557	40	8	2	0.857
7353	40	10	0.5	1.083
5878	42.5	5	0.5	0.575
4319	45	4	0.5	0.487
6282	50	3	0.5	0.405
6204	50	4	0.5	0.541
7597	50	5	0.5	0.676
5966	50	6	0.5	0.812
5611	50	10	0.5	1.354
4311	50	20	3	2.689
6371	53	3.5	0.5	0.502
9621	57.5	4.5	1	0.699
4526	60	5	0.5	0.812
7797	61	6	1	0.989
9931	70	10	0.5	1.896
7890	76	8	PAH	1.642
4659	80	9.9	0.5	2.145
6698	80	30	5	6.445
8539	80	40	1	8.670
7933	85	5	0.5	1.152
9478	95	9	1	2.315
7786	100	5	0.5	1.354
4305	100	10	1	2.707
11779	100	15	1	4.063


[illegible]

[illegible][illegible]


OVALNI PROFIL

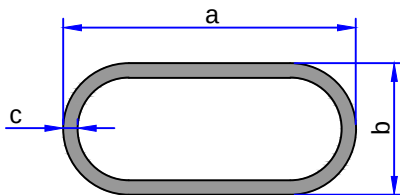[illegible][illegible]


Napomena: Označene težine su teorijski navedene. U proizvodnju radi kalupa može doći %3- %5 promjene težine, zbog boje %4-%6 razlika u težini.

[illegible]

KARE ŠIPKE

[illegible][illegible]

* Radiuslu / Pah'lı



PROFİL NO	ØD mm	Kg/m
6665	4	0.034
3167	6	0.076
3969	7	0.104
1679	7.7	0.126
3847	7.8	0.129
3070	8	0.136
4823	9	0.172
9483	9.8	0.204
3497	10	0.212
4275	12	0.306
4339	13	0.359
3072	14	0.417
3168	16	0.544
6306	17	0.615
5712	18	0.689
10083	19.9	0.843
3169	20	0.851
7371	21.05	0.943
11016	21.8	1.012
3633	22	1.030
7370	23	1.125
3604	24	1.255
4300	25	1.330
9454	25.5	1.384
3634	26	1.438
7682	28	1.668
3071	30	1.915
3637	35	2.607
5280	36.3	2.804
4178	40	3.405
6365	42.7	3.880
3632	44	4.120
9157	45	4.310
4177	50	5.321
3670	53	5.978
7931	55	6.438
3823	56	6.664
4240	60	7.662
5333	68	9.841
11454	70	10.429

[illegible]